

# Fluid Cooling Mobile AOC Series

## Performance Notes

- Low amp draw motors (except AOC-70)
- Remote mount
- Does not block main engine radiator
- Long life hydraulic motor
- Protected core
- Heavy duty construction
- 3/4" tube size
- Heat removal up to 160 HP
- Oil flows to 150 GPM
- DC or hydraulic motors
- SAE connections standard
- High performance air side fin design



**OPTIONS**  
Serviceable internal pressure bypass  
NPT, BSPP or SAE connections

## Ratings

**Maximum Operating Pressure**  
300 PSI

**Test Pressure**  
300 PSI

**Maximum Operating Temperature**  
350°F

## Materials

**Tubes** Copper

**Fins** Aluminum

**Turbulators** Aluminum

**Fan Blade - DC Motor** High impact plastic

**Fan Blade - Hydraulic motor** Aluminum with steel hub

**Fan Guard - Hydraulic motor** Steel with black powder coat

**Manifolds** Steel

**Connections** Steel

**Cabinet** Steel with powder coat

**Filter** Stainless frame with washable media

**Nameplate** Aluminum

## Internal Pressure Bypass Option

### AOC-19 through AOC-33

Available in either 30 PSI or 60 PSI settings. 3/4", external, all steel valve. May be removed for servicing.

### AOC-37 through AOC-70

Available in either 30 PSI or 60 PSI settings. 1½", external, all steel valve. May be removed for servicing.


## How to Order

<b>AOC</b>	-	[ ] [ ]	-	[ ]	-	[ ]	-	[ ]
<b>Model Series</b>		<b>Model Size Selected</b>		<b>Connection Type*</b>		<b>Bypass</b>		<b>Specify Motor Required</b>
				<b>1</b> - NPT <b>2</b> - SAE <b>3</b> - BSPP		<b>Blank</b> - No Bypass <b>30</b> - 30 PSI <b>60</b> - 60 PSI		<b>NM</b> - No Motor <b>4A</b> - 12 Volt <b>4B</b> - 24 Volt <b>9</b> - Hydraulic Motor


This is a partial flow pressure bypass only. It is not designed to be a full flow system bypass.

# Dimensions

## AOC-19 through AOC-33

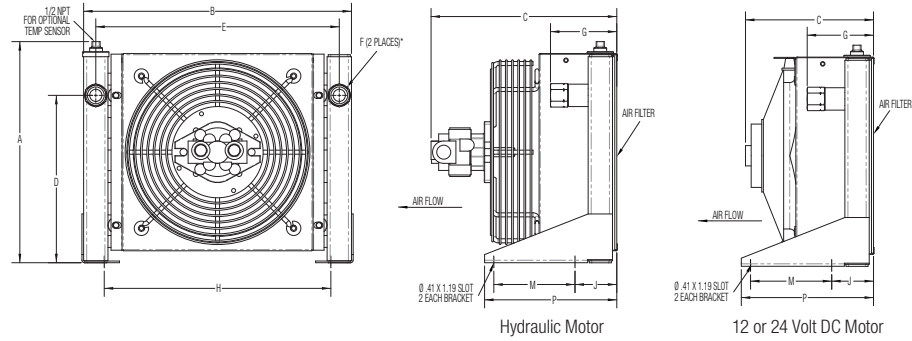

## AOC-37 through AOC-70

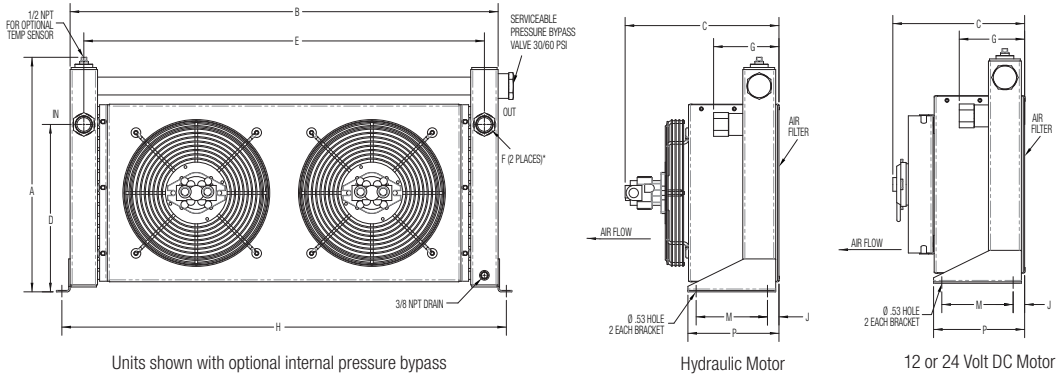

Units shown with optional internal pressure bypass

Model	A		B		C		D	E	F		G		H	J	M	P	Weight LBS	HYD Motor CFM	12/24 V Motor CFM
	No Bypass	Bypass	No Bypass	Bypass	HYD Motor	DC Motor			SAE	NPT & BSPP	SAE	NPT & BSPP							
AOC-19	13.62	16.00	16.50	18.16	10.40	7.92	10.31	15.00	#12	.75	3.05	4.12	13.96	2.61	5.00	8.18	30	750	800
AOC-22	15.62	18.00	22.00	23.66	10.40	7.92	12.31	20.50	#12	.75	3.05	4.12	19.46	2.61	5.00	8.18	33	1150	1050
AOC-24	19.62	22.00	24.75	26.41	11.58	9.69	16.31	23.25	#12	.75	3.05	4.12	22.21	2.61	5.00	8.18	46	1900	1300
AOC-33	25.62	28.00	30.25	31.91	11.58	9.31	22.31	28.75	#16	1.00	3.05	4.34	27.71	2.61	5.00	8.18	65	2150	1500
AOC-37	18.50	21.38	39.00	40.38	14.06	10.84	15.25	36.50	#20	1.25	4.62	5.97	40.50	1.09	6.50	8.31	95	2150	1850
AOC-50	22.50	25.38	41.00	42.38	14.06	10.84	19.25	38.50	#20	1.25	4.68	6.03	42.50	1.12	6.50	8.37	120	3200	2300
AOC-54	30.50	33.28	42.00	43.38	14.93	15.08	27.25	39.50	#24	1.50	4.89	6.30	43.75	1.87	9.00	12.37	154	3800	2600
AOC-57	36.50	39.38	48.00	49.38	14.93	15.08	32.75	45.50	#32	2.00	6.68	8.15	49.75	1.87	9.00	12.37	190	4200	2900
AOC-70	38.38	41.25	51.00	52.38	17.79	24.62	34.00	48.50	#32	2.00	8.44	9.91	52.75	1.62	9.00	12.12	304	7500	7050

NOTE: All dimensions in inches. We reserve the right to make reasonable design changes without notice. Inlet and outlet oil ports reversible if bypass option is not used.

## Hydraulic Motor Data

Model	Number of Fans	Maximum Fan Speed (RPM)	Oil Flow Required per Fan (GPM)	Minimum Operating Pressure (PSI)	Motor (IN <sup>3</sup> /REV.) Displacement
AOC-19 through AOC-33	1	1725	1.6	300	.22
AOC-37 through AOC-57	2	1725	1.6	300	.22
AOC-70	2	1725	3.4	500	.45


Notes: Maximum pressure is 2000 PSI. Stated Minimum Operating Pressure is at Inlet Port of Motor. 1000 PSI Allowable Back Pressure.

## 12 and 24 Volt DC Motor Data


Model	Number of Fans	Full Load AMPs per Motor		HP per Motor	Fan Speed (RPM)	Fan Diameter (Inches)
		12 Volt	24 Volt			
AOC-19	1	12.5	6.3	1/5	1800	10
AOC-22	1	12.5	6.3	1/5	1800	12
AOC-24, AOC-33	1	12.5	6.3	1/5	1800	14
AOC-37	2	12.5	6.3	1/5	1800	12
AOC-50, AOC-54, AOC-57	2	12.5	6.3	1/5	1800	14
AOC-70	2	80	39	1	1800	20

# Performance Curves

## AOC with DC Motor

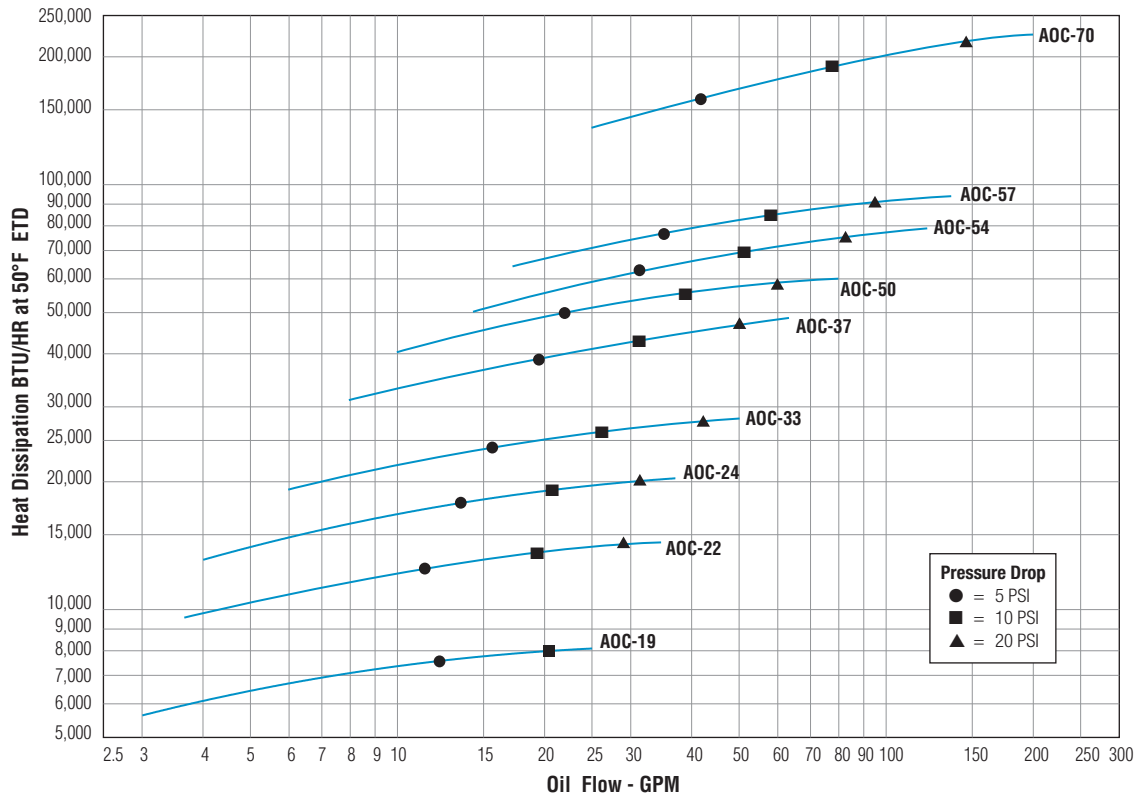

## AOC with Hydraulic Motor

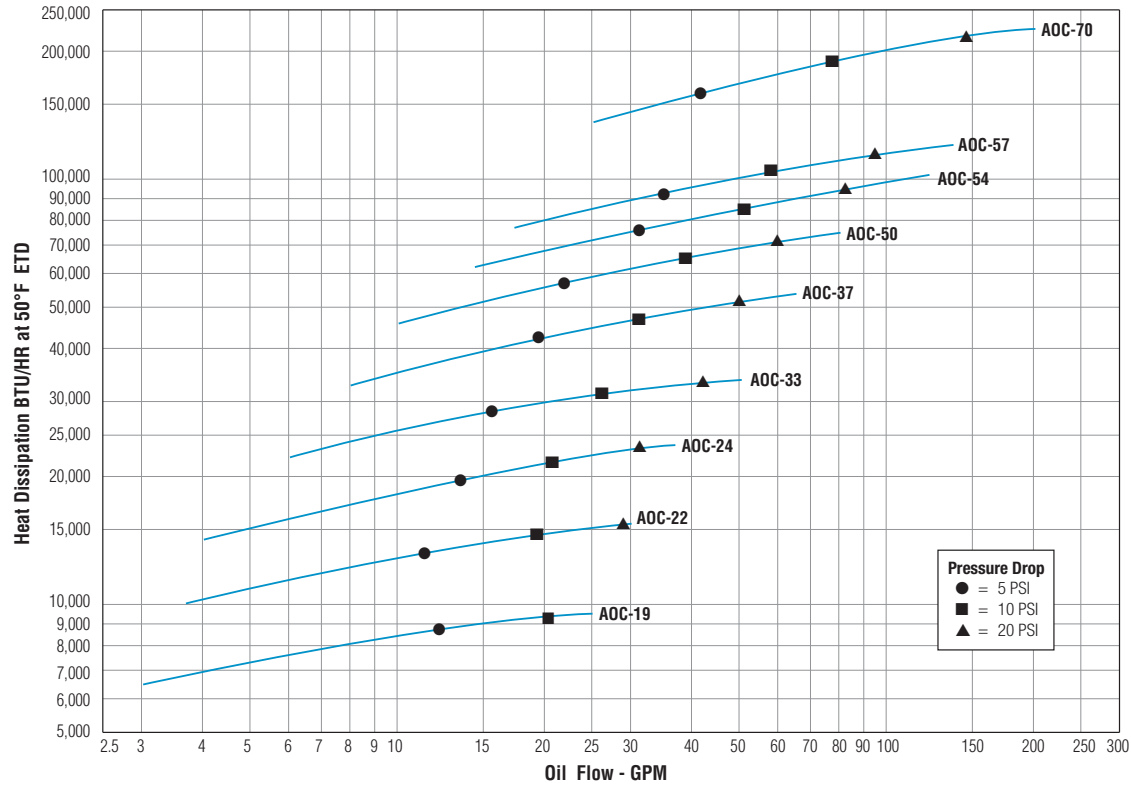

# Selection Procedure

Performance Curves are based on 50SSU oil entering the cooler 50°F higher than the ambient air temperature used for cooling. This is also referred to as a 50°F Entering Temperature Difference (ETD).

**STEP 1 Determine the Heat Load.** This will vary with different systems, but typically coolers are sized to remove 25 to 50% of the input nameplate horsepower.  
(Example: 100 HP Power Unit x .33 = 33 HP Heat load.)  
To convert HP to BTU/HR: HP x 2545 = BTU/HR


**STEP 2 Entering Temperature Difference.** Desired oil entering cooler °F – Ambient air temp. °F = Actual ETD

**STEP 3 Determine Curve BTU/HR Heat Load.** Enter the information from above:  
BTU/HR heat load x  $\frac{50 \times C_v}{ETD}$  = Curve BTU/HR

**STEP 4 Enter curves** at oil flow through cooler and curve horsepower. Any curve above the intersecting point will work.

**STEP 5 Determine Oil Pressure Drop from Curves:**  
● = 5 PSI   ■ = 10 PSI   ▲ = 20 PSI Multiply pressure drop from curve by correction factor found in oil ΔP correction curve.

## Oil Pressure Correction

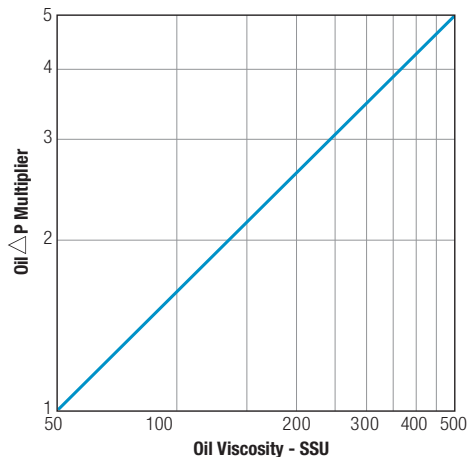

## C<sub>v</sub> Viscosity Correction

Average Oil Temp °F	OIL				
	SAE 5 110 SSU at 100°F 40 SSU at 210°F	SAE 10 150 SSU at 100°F 43 SSU at 210°F	SAE 20 275 SSU at 100°F 50 SSU at 210°F	SAE 30 500 SSU at 100°F 65 SSU at 210°F	SAE 40 750 SSU at 100°F 75 SSU at 210°F
100	1.14	1.22	1.35	1.58	1.77
150	1.01	1.05	1.11	1.21	1.31
200	.99	1.00	1.01	1.08	1.10
250	.95	.98	.99	1.00	1.00

## Desired Reservoir Temperature

**Return Line Cooling:** Desired temperature is the oil temperature leaving the cooler. This will be the same temperature that will be found in the reservoir.

**Off-Line Recirculation Cooling Loop:** Desired temperature is the oil temperature entering the cooler. In this case, the oil temperature change must be determined so that the actual oil leaving temperature can be found.

Calculate the oil temperature change (oil ΔT) with this formula:  
Oil ΔT = (BTU's/HR) / (GPM Oil Flow x 210).

To calculate the oil leaving temperature from the cooler, use this formula:  
Oil Leaving Temp. = Oil Entering Temp – Oil ΔT.

This formula may also be used in any application where the only temperature available is the entering oil temperature.

**Oil Pressure Drop:** Most systems can tolerate a pressure drop through the heat exchanger of 20 to 30 PSI. Excessive pressure drop should be avoided. Care should be taken to limit pressure drop to 5 PSI or less for case drain applications where high back pressure may damage the pump shaft seals.

## Oil Temperature

Typical operating temperature ranges are:

Hydraulic Motor Oil	110°- 130°F
Hydrostatic Drive Oil	130°- 180°F
Bearing Lube Oil	120°- 160°F
Lube Oil Circuits	110°- 130°F

Read carefully before attempting to assemble, install, operate or maintain the product described. Protect yourself and others by observing all safety information. Failure to comply with instructions could result in personal injury and/or property damage! Retain instructions for future reference.

### Description

AOC series forced air oil coolers are used for high-efficiency oil cooling in hydraulic systems. Units utilize the latest in heat transfer technology to reduce the physical size and provide the ultimate in cooling capacity. By maintaining a lower oil temperature, hydraulic components and fluids work better and have a longer life expectancy.

### General Safety Information

1. Do not exceed the pressure rating of the oil cooler, nor any other component in the hydraulic system.
2. Do not exceed the published maximum flow rates as the potential can result in damage to the hydraulic system.
3. Release all oil pressure from the system before installing or servicing the oil cooler.
4. These oil coolers are not suitable for use in hydraulic systems operating with water-glycol or high water base fluids without a corrosion inhibitor suitable for aluminum and copper component protection.

### Unpacking

After unpacking the unit, inspect for any loose, missing or damaged parts. Any minor damage to the cooling fins can generally be corrected by gently straightening them.

### WARNING

*Do not exceed the maximum pressure of 300 PSI, or the maximum temperature of 350°F as oil cooler failure can occur.*

1. These hydraulic oil coolers should be installed on either the low pressure return line, or a dedicated recirculation cooling loop.
2. Turn off the hydraulic system and drain any oil from the return lines before installing these coolers.
3. A strainer located ahead of the cooler inlet should be installed to trap scale, dirt, or sludge that may be present in piping and equipment, or that may accumulate with use. A thermostatic or spring loaded bypass/relief valve installed ahead of the cooler may be helpful to speed warm-up and relieve the system of excessive pressures.

**CAUTION** *Use of a back-up wrench is recommended to prevent twisting of the manifolds when installing the oil piping. If pipe sealant is used on threads, the degree of resistance between mating parts is less, and there is an increased chance for cracking the heat exchanger fittings. Do not over tighten.*

4. Piping must be properly supported to prevent excess strain on the heat exchanger ports.

### Operation

Once unit is installed, turn the fan by hand to eliminate possible part interference because of damage in shipment or installation. Observe the fan operation upon initial startup. The system may then be operated.

### Maintenance

Inspect the unit regularly for loose bolts and connections, rust and corrosion, and dirty or clogged heat transfer surfaces (cooling coil).

### Heat Transfer Surfaces

Dirt and dust should be removed by brushing the fins and tubes and blowing loose dirt off with compressed air. Should the surface be greasy, the cooler should be brushed or sprayed with a mild alkaline solution, or a non-flammable degreasing fluid. Follow with a hot water rinse and dry thoroughly. A steam cleaner may also be used effectively. *Do not use caustic cleaners.*

### Casing Fan and Motor

Dirt and grease should be removed. Rusty or corroded surfaces should be sanded clean and repainted.

### Internal Cleaning

At least once a year, piping should be disconnected and degreasing agent or flushing oil circulated through the unit to remove sludge from turbulators and internal tube surfaces to return the unit to full thermal capacity. A thorough cleaning of the entire system in the same manner is preferable to avoid carry-over from uncleaned piping, pumps and accessories. The strainer or any filtering devices should be removed and serviced following this cleaning operation.

## Trouble Shooting Chart

Symptom	Possible Cause	Corrective Action
Not cooling adequately	Not enough air flow	Consult specifications and adjust if required
	Unit is fouled	Clean exchanger (see maintenance)
	Unit is undersized	Check specifications and change size if necessary
Leaking at connections	Not tight	Tighten carefully
	No thread sealant	Remove pipe, apply thread sealant and reinstall